



China Sanew Cable Co., Ltd.

UL1659 High Temperature PFA Insulated Wire


Product Features:

UL1659 High Temperature PFA Insulated Wire is resistant to acids, alkalies, oils, flame retardant, fire, and low smoke, no halogen.

And the conductor is solid or stranded silver-plated copper or tinned copper conductor, 10 ~ 36 AWG. The insulation is color-coded PFA which has standard thickness, and is easy stripping and cutting.

The applications :

UL1659 High Temperature PFA Insulated Wire is widely applied in aviation; metallurgy and petroleum industry as well as applied in other products such as: electronic instrument & device, electrical appliance, leads for transformer & electrical motor.

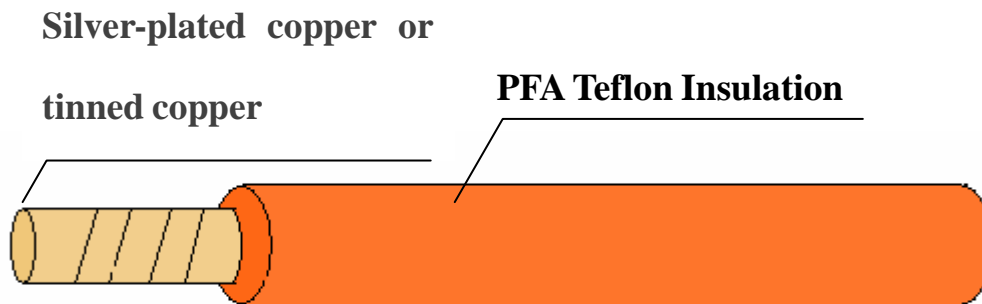

TECHNICAL DATA:

Conductor:

Insulation:

Temperature Rating:

Operating Voltage:

Conductor stranding:

Color Code

Approvals:

Silver-plated Copper or Tinned copper

PFA

-80°C to +250°C

600V

Please look the next page.

According to clients

According to VDE, UL



China Sanew Cable Co., Ltd.

UL1659 High Temperature PFA Insulated Wire

Size AWG	Conductor		Insulation		Maximum Resistance at 20℃Ω/km
	Conductor Stranding No./mm	Conductor Dia. (mm)	Nominal Thick	Nominal Dia.	
36	1/0.14	0.14	0.20	0.48±0.05	997
34	1/0.16	0.16	0.20	0.50±0.08	758
32	1/0.20 7/0.08	0.20	0.20	0.52±0.08	586
30	1/0.25 7/0.10	0.25 0.30	0.20	0.65±0.08 0.70±0.08	408
28	1/0.32 7/0.12	0.32 0.35	0.25	0.82±0.08 0.85±0.08	213
26	1/0.40 7/0.15	0.40 0.45	0.35	1.10±0.08	138
24	1/0.50 7/0.20	0.50 0.60	0.35	1.20±0.08 1.30±0.08	90.4
22	7/0.254 19/0.16	0.76 0.80	0.35	1.45±0.11	50.8
20	19/0.19	0.95	0.35	1.65±0.11	33.6
18	19/0.24	1.20	0.35	1.85±0.11	24.6
16	19/0.30	1.50	0.40	2.30±0.16	16.6
14	19/0.37	1.85	0.40	2.65±0.16	9.5
12	19/0.49	2.60	0.45	3.50±0.20	5.7
10	37/0.45	3.15	0.50	4.15±0.20	3.64