



China Sanew Cable Co., Ltd.

UL1885 High Temperature FEP Insulated Wire


Product Features:

UL1885 High Temperature FEP Insulated Wire is resistant to acids, alkalies, oils, flame retardant, fire, and low smoke, no halogen.

And the conductor is solid or stranded silver-plated copper or tinned copper conductor, 10 ~ 36 AWG. The insulation is color-coded FEP which has standard thickness, and is easy stripping and cutting.

The applications:

UL1885 High Temperature FEP Insulated Wire is widely applied in aviation; metallurgy and petroleum industry as well as applied in other products such as: electronic instrument & device, electrical appliance, leads for transformer & electrical motor.

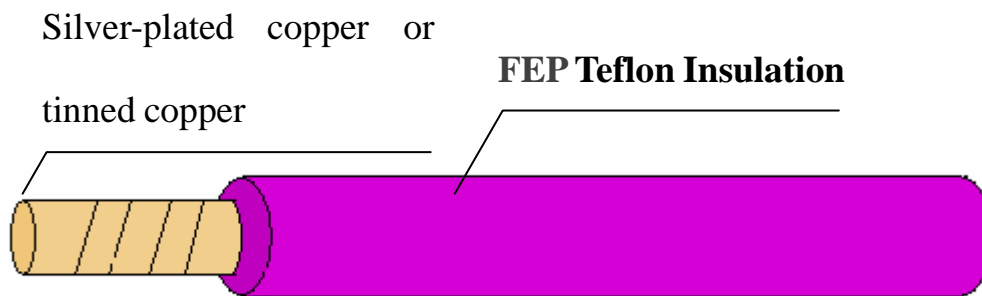

TECHNICAL DATA:

Conductor:

Silver-plated Copper or Tinned copper

Insulation:

FEP

Temperature Rating:

-80°C to +200°C

Operating Voltage:

600V

Conductor stranding:

Please see the next page

Color Code

According to clients

Approvals:

According to VDE, UL



China Sanew Cable Co., Ltd.

UL1885 High Temperature FEP Insulated Wire

Size AWG	Conductor		Insulation (mm)		Maximum Resistance at 20°C (Ω/km)
	Stranding No./mm	Dia. (mm)	Nominal Thick	Nominal Dia.	
36	1/0.14	0.14	0.20	0.48±0.05	997
34	1/0.16	0.16	0.20	0.50±0.08	758
32	1/0.20 7/0.08	0.20	0.20	0.52±0.08	586
30	1/0.25 7/0.10	0.25 0.30	0.20	0.65±0.08 0.70±0.08	408
28	1/0.32 7/0.12	0.32 0.35	0.25	0.82±0.08 0.85±0.08	213
26	1/0.40 7/0.15	0.40 0.45	0.35	1.10±0.08	138
24	1/0.50 7/0.20	0.50 0.60	0.35	1.20±0.08 1.30±0.08	90.4
22	7/0.254 19/0.16	0.76 0.80	0.35	1.45±0.11	50.8
20	19/0.19	0.95	0.35	1.65±0.11	33.6
18	19/0.24	1.20	0.35	1.85±0.11	24.6
16	19/0.30	1.50	0.40	2.30±0.16	16.6
14	19/0.37	1.85	0.40	2.65±0.16	9.5
12	19/0.49	2.60	0.45	3.50±0.20	5.7
10	37/0.45	3.15	0.50	4.15±0.20	3.64